


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 24 TOWNSHIP 17 RANGE 2  
DATE: 4-13-2000 5-9-05  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison (no cap)  
METHOD OF ESTABLISHMENT: County: 8-17-94

IN. S.P.C. E ZONE, NAD 83  
NAME: 17022401  
N: 517763.0210(m)  
E: 49279.9080(m)

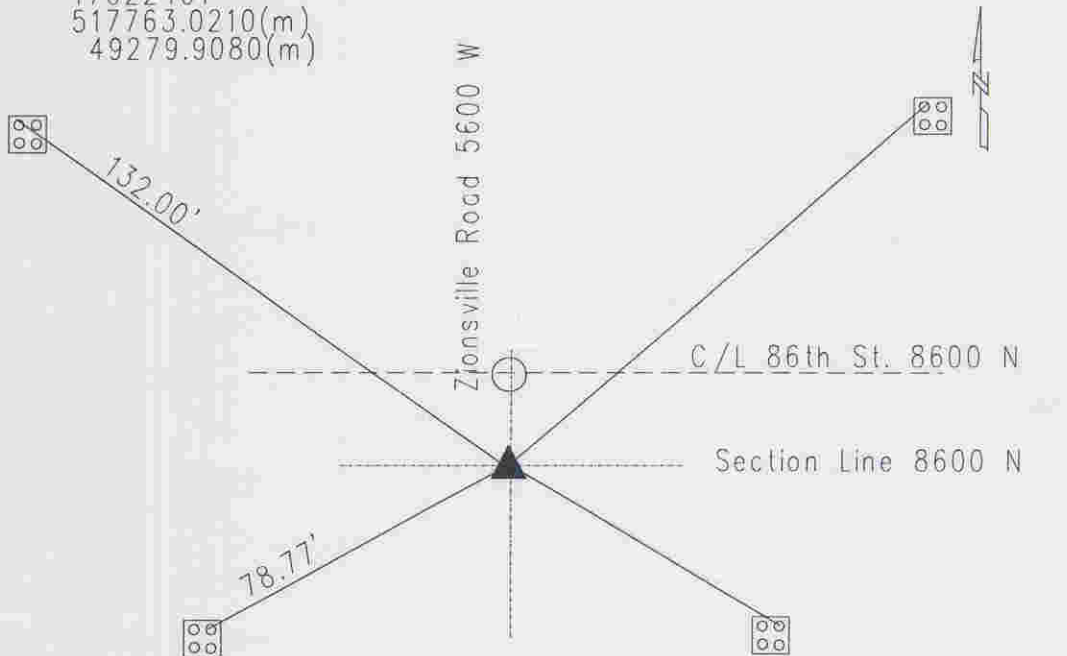

Original post set 1821 by Laughlin with witnesses: 12' hickory N 82 W 11 links, 10' white oak N 40 e 18 links per Marion County Atlas pg. 4. Hosbrook 8-5-1851 called rock set with stump witnesses per Pike Township Legal survey Book pg. 19. Miller 4-30-75 called railroad spike. Gries 3-15-88 called a railroad spike. Excavated by Kiste 8-17-94 and set Harrison. Re-tied 4-13-2000 by Wilcoxen.

HC722401

REF.	DISTANCE	DESCRIPTION
1.	33.86'	Due N to DOT C/L monument
2.	149.38'	Cut 'x' NW-bolt of signal light base
3.	85.50'	Cut 'x'NE-bolt signal light base
4.	78.77'	Cut 'x' NE-bolt of signal; light base
5.	132.00'	Cut 'x' SW-bolt of signal light base